


# Instructions to Replace Deluxe Tap

Part Number: Tap GN-P or Tap DC-P

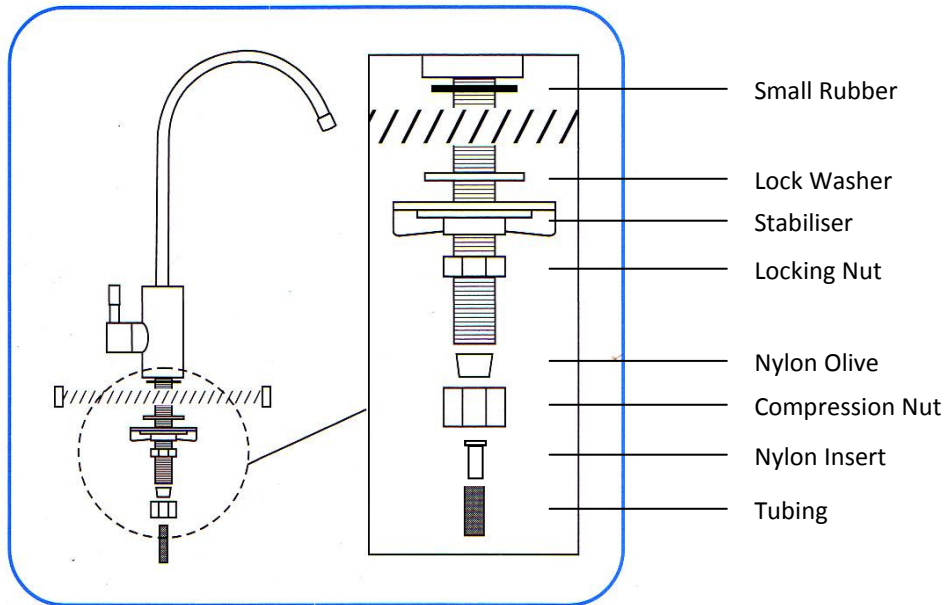

1. Turn off water to the unit at the connecting valve.
2. Turn on the tap to check water is turned off; this also relieves the pressure from the lines.
3. Undo the Compression Nut; this removes the tubing from the end of the brass shaft.
4. Undo the locking nut from the base and remove, along with any washers/stabilisers.
5. You will now be able to lift the tap up and out of the hole on the bench top.
6. Replace tap into the hole in bench top with small rubber in place and refit the locking washer, stabiliser and locking nut.
7. Place the insert in the tube end & slide the tube through the compression nut and olive.
8. Insert the tube into the tap shaft with the olive flush with the base.
9. Screw the compression nut onto the shaft and tighten.
10. Turn water to unit back on via the connecting valve.